





# Air-operated pumps for TRANSFER





Ratio 1:1 Flow rate 35 l/min





**Air-operated pumps for short and medium-distance transfer.** Ideal for transferring low-medium viscosity fluids such as: oils, lubricants and similar products. The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 107), enables numerous uses through the application of modular extensions (refer to page 112).

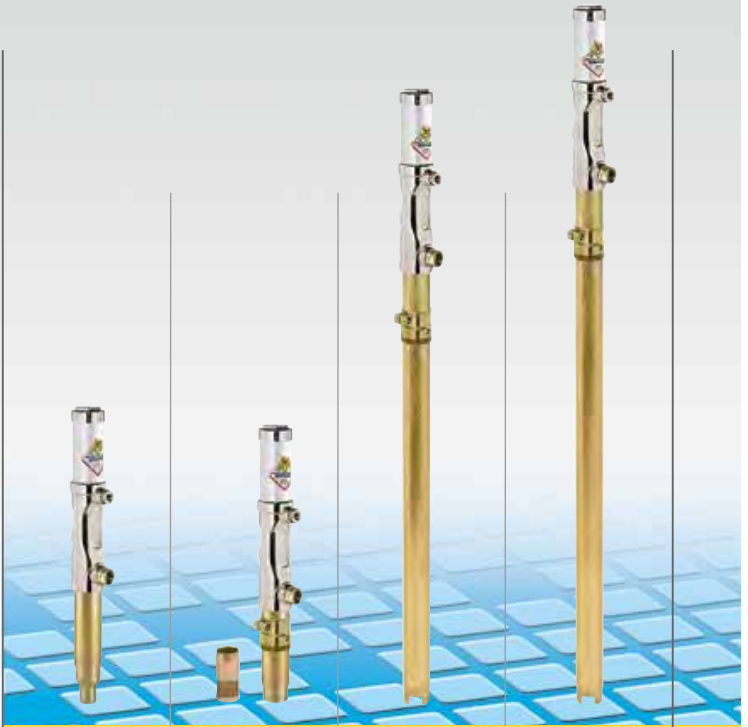


series 500

|                               |                     |   |  |   |   |
|-------------------------------|---------------------|---|--|---|---|
| Article with seals in         | <b>NBR</b>          |   |  |   |   |
| Article with seals in         | <b>Viton®</b>       | <b>26090</b>  | <b>26091</b>   | <b>26093</b>  | <b>26094</b>  |
| Article with seals in         | <b>Teflon®</b>      |   |  |   |   |
| Compatible fluids             |                     | Oils, lubricants and similar  |  |   |   |
| Suction tube upper body       |                     | Aluminum  |  |   |   |
| Suction tube                  |                     | Carbon steel  |  |   |   |
| Air inlet connection          | bsp                 | F 1/4" G  | F 1/4" G   | F 1/4" G  | F 1/4" G  |
| Fluid outlet connection       | bsp                 | F 3/4" G  | F 3/4" G   | F 3/4" G  | F 3/4" G  |
| Air working pressure          | bar                 | 6 - 8   | 6 - 8  | 6 - 8   | 6 - 8   |
| Average air consumption       | l/min               | 250   | 250  | 250   | 250   |
| Noise level                   | dB                  | 81  | 81   | 81  | 81  |
| Max deliverable oil viscosity | SAE                 | 80  | 80   | 80  | 80  |
| Bung adaptor                  |                     | -   | standard   | standard  | standard  |
| Suitable for drums or tanks   |                     |  |  |  |  |
|                               |                     | modular   | customisable 1"  | suitable for drums 50-60 Kg   | suitable for drums 180-220 kg   |
| Packing                       | N° - m <sup>3</sup> | 1 - 0,010   | 1 - 0,010  | 1 - 0,020   | 1 - 0,020   |
| Weight                        | kg                  | 5,5   | 6  | 7,2   | 7,2   |
| Dimensions (A - B - C)        | cm                  | 33,2 - 20,8 - 5   | 33,2 - 16,8 - 5  | 33,2 - 74 - 5   | 33,2 - 94 - 5   |

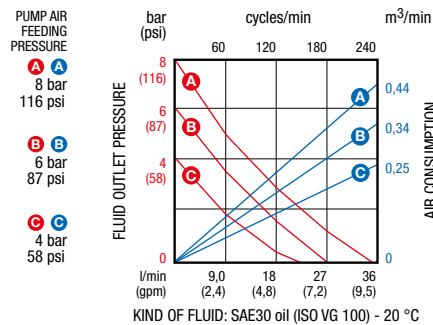





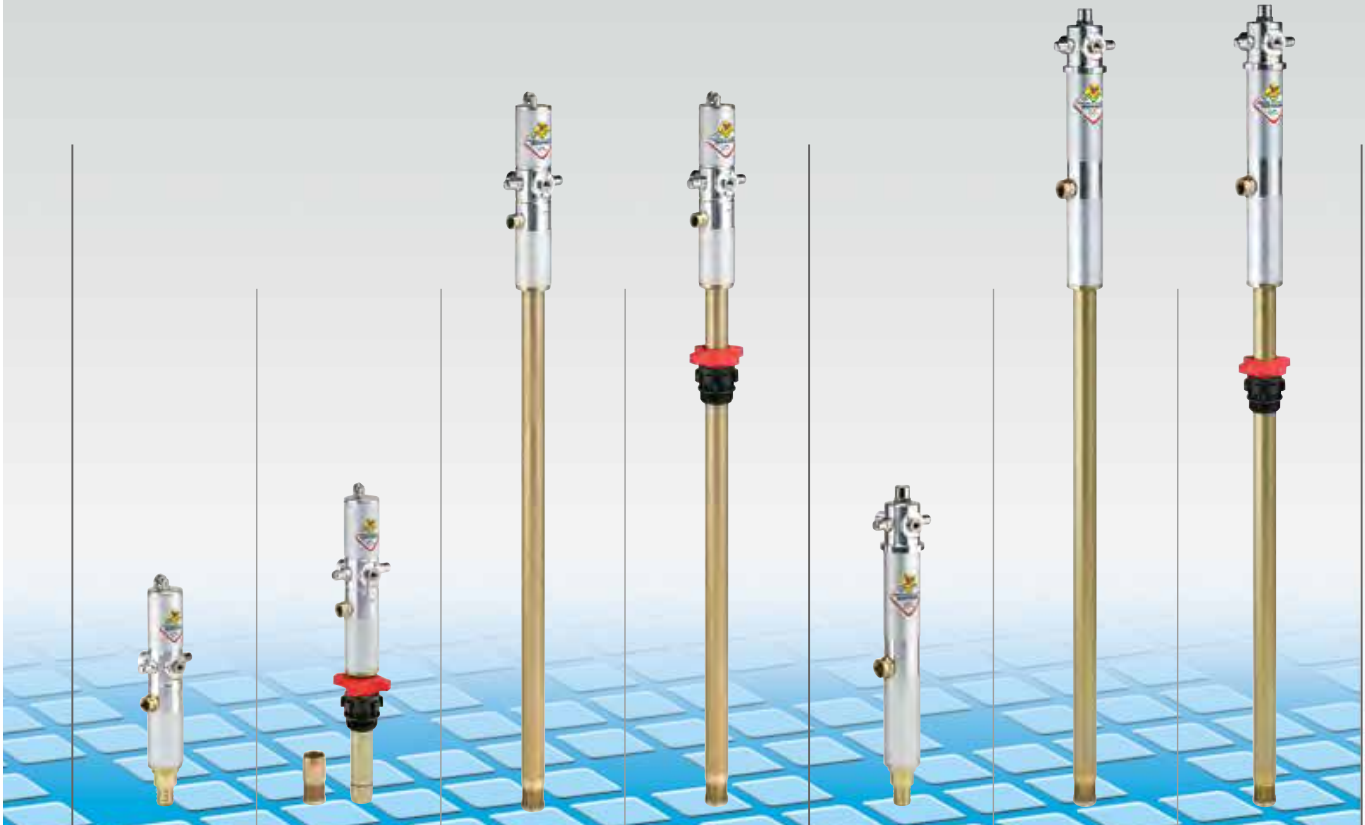


Ratio 1:1 Flow rate 23 l/min



Ratio 1:1 Flow rate 40 l/min



series 600

serie 650

|   |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
| 33080   | 33081   | 33082   | 33083   |  |   |   |
| 33070   | 33071   | 33072   | 33073   | 33170  | 33172   | 33173   |
| 33060   | 33061   | 33094   | 33096   | 33160  | 33194   | 33196   |
| Oils, lubricants and similar<br>Aluminum<br>Carbon steel                            |   |   |   | Oils, lubricants and similar<br>Aluminum<br>Carbon steel                             |   |   |
| F 1/4" G  | F 1/4" G  | F 1/4" G  | F 1/4" G  | F 1/4" G   | F 1/4" G  | F 1/4" G  |
| F 1/2" G  | F 1/2" G  | F 1/2" G  | F 1/2" G  | F 3/4" G   | F 3/4" G  | F 3/4" G  |
| 6 - 8   | 6 - 8   | 6 - 8   | 6 - 8   | 6 - 8  | 6 - 8   | 6 - 8   |
| 230   | 230   | 230   | 230   | 370  | 370   | 370   |
| 81  | 81  | 81  | 81  | 81   | 81  | 81  |
| 80  | 80  | 80  | 80  | 130  | 130   | 130   |
| -   | standard  | -   | standard  | -  | -   | standard  |
|  |  |  |  |  |  |  |
| modular   | customisable 1"   | suitable for drums<br>180-220 kg  | suitable for drums<br>180-220 kg  | modular  | suitable for drums<br>180-220 kg  | suitable for drums<br>180-220 kg  |
| 1 - 0,006   | 1 - 0,006   | 1 - 0,020   | 1 - 0,020   | 1 - 0,010  | 1 - 0,020   | 1 - 0,020   |
| 4,3   | 5   | 6,2   | 6,3   | 5,3  | 7,3   | 7,4   |
| 35,5 - 0 - 0  | 35,5 - 22 - 4,2   | 35,5 - 94 - 4,2   | 35,5 - 94 - 4,2   | 50,5 - 0 - 0   | 50,5 - 94 - 4,2   | 50,5 - 94 - 4,2   |

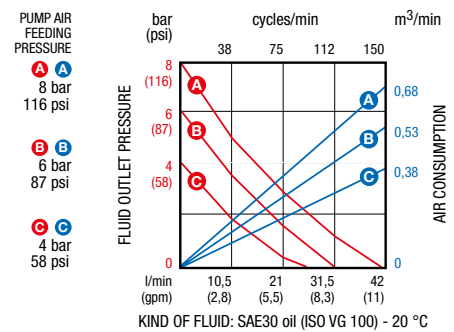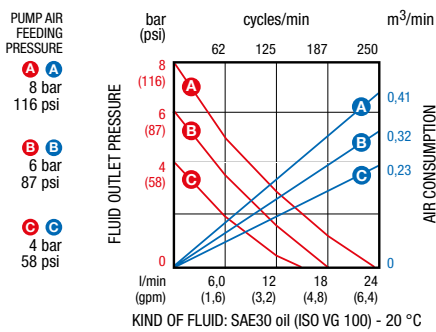

## P/N 33096

Pneumatic piston pump s. 600 for transferring oil and similar, R 1:1 - 23 l/min with Teflon® seals and suction tube 940 mm with bung adaptor for 180÷220 kg drums

### AREAS OF USE

Aeronautics, Automotive, Building and road construction, Manufacturing industry, Lube trucks and transports, Railway transport

### FEATURES

|                               |                                    |
|-------------------------------|------------------------------------|
| Flow rate                     | 23 l/min                           |
| Ratio                         | 1:1                                |
| Compatible fluids             | oils, lubricants and similar       |
| Suction tube upper body       | aluminum                           |
| Suction tube                  | carbon steel                       |
| Air inlet connection          | G 1/4" (f)                         |
| Fluid outlet connection       | G 1/2" (f)                         |
| Air working pressure          | 6 ÷ 8 bar                          |
| Average air consumption       | 230 l/min                          |
| Noise level                   | 81 dB                              |
| max deliverable oil viscosity | SAE 80                             |
| Bung adaptor                  | standard                           |
| Suitable for drums or tanks   | suitable for drums<br>180 ÷ 220 kg |
| Packing                       | No. 1 - 0,020 m3                   |
| Weight                        | 6,3 kg                             |



### OVERALL DIMENSIONS (mm)

